


Hydrodemolition Production Rate Estimation Guide

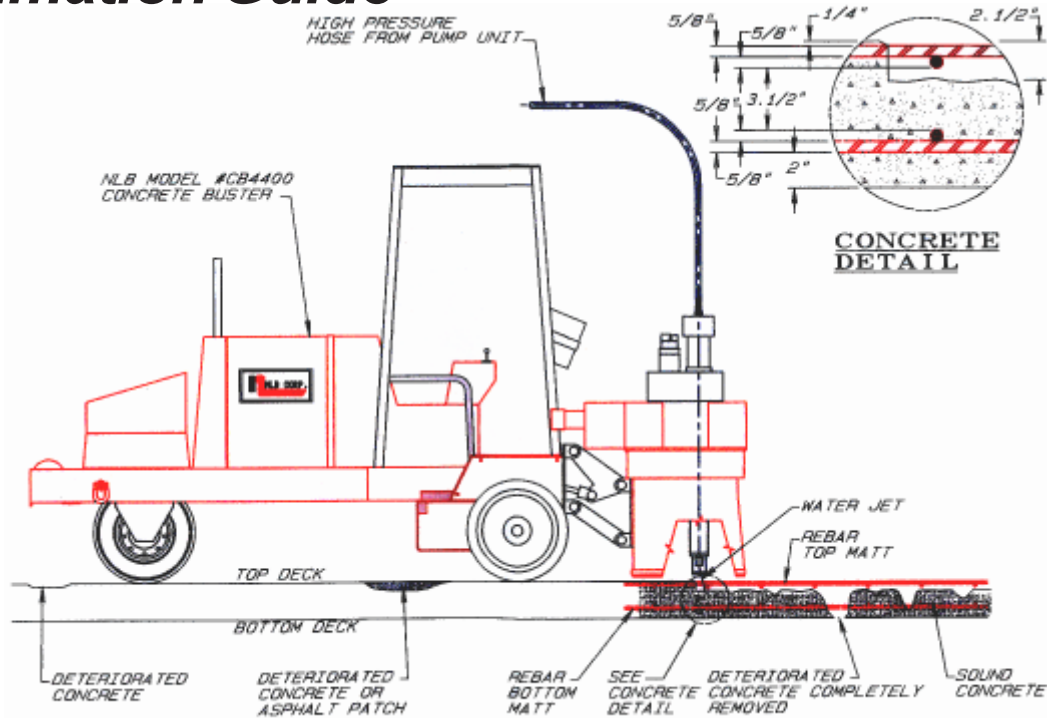

Estimated Production Rates for Hydrodemolition

Equipment: NLB Model 20600D and 4400 Robot

Concrete: Bridge deck 4,000 psi concrete milled surface with 3/4" crushed stone aggregate.

Depth of Removal	Estimated Production Rate
3/4 inch	40 to 60 sq. yards per hour
1 inch	35 to 55 sq. yards per hour
2 inches	20 to 35 sq. yards per hour
3 inches	15 to 25 sq. yards per hour
4 inches	10 to 22 sq. yards per hour

Above production rates are based on contractor experience. Production rates may vary subject to aggregate size, compressive strength of concrete, number of rebar and size of rebar.



The Concrete Buster seeks out and removes delaminated concrete.

The Leader in High-Pressure Water Jet Technology