

## National Pipe Tapered (NPT)


NPT fittings are threaded with a maximum working pressure of 10,000 psi (690 bar).

THREAD SIZES
1/8"-27
1/4"-18
3/8"-18
1/2"-14
3/4"-14
1"-11.5

## Type "M" Swivel Nut Connection

The Type "M" Swivel End Fitting is a swivel nut joint with a 58° male cone hose insert. Their maximum working pressure rating is 20,000 psi (1,380 bar).

THREAD SIZES DETERMINED BY HOSE TYPE
9/16"-18
7/8"-14
3/4"-16
1"-12
1-5/16"-12

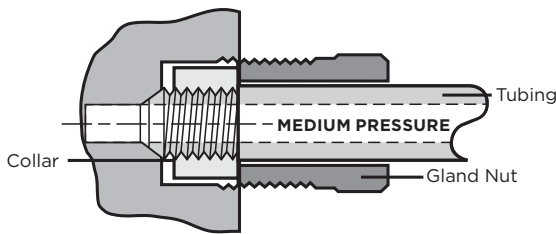


## Medium-Pressure Connection

Medium-Pressure (sometimes known as "Slimline") Fittings have a 58°/60° coned and threaded tubing design. With large bore sizes, their maximum working pressure rating is 20,000 psi (1,380 bar).

Identification is by tubing O.D.

TUBE O.D.	TUBE I.D.	COLLAR THREAD	GLAND NUT THREAD
1/4"	.11"	1/4" - 28 LH	7/16" - 20
3/8"	.20"	3/8" - 24 LH	9/16" - 18
9/16"	.31"	9/16" - 18 LH	13/16" - 16
3/4"	.43"	3/4" - 16 LH	3/4" - 14 NPS
1"	.56"	1" - 14 LH	1-3/8" - 12

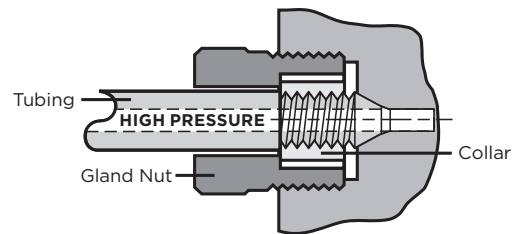

## High-Pressure Connection

A High-Pressure Fitting is a 58°/60° coned and threaded tubing design. With a small bore size, the maximum working pressure rating is 60,000 psi (4,140 bar).

Identification is by tubing O.D.

TUBE O.D.	TUBE I.D.	COLLAR THREAD	GLAND NUT THREAD
1/4"	.08"	1/4" - 28 LH	9/16" - 18
3/8"	.125"	3/8" - 24 LH	3/4" - 16
9/16"	.31"	9/16" - 18 LH	1-1/8" - 12